

# Eco Industrial Supplies



## Recessed LED stair light and wall light



B1QR0102




B1QS0102

[www.ecoindustrialsupplies.com](http://www.ecoindustrialsupplies.com)

[ecoindustrial@internode.on.net](mailto:ecoindustrial@internode.on.net)

### Front cover color option

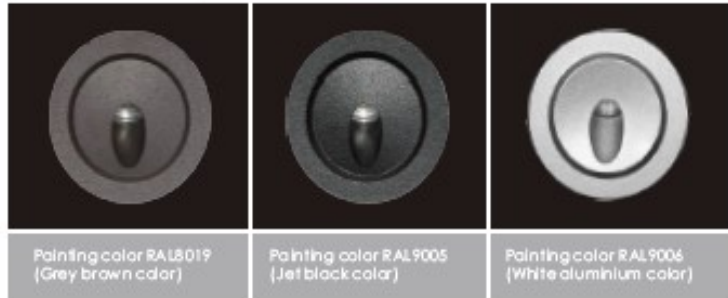

Painting color RAL8019 (Grey brown color)

Painting color RAL9005 (Jet black color)


Painting color RAL9006 (White aluminum color)



Installation with clips embedded into sleeve, fix on the concrete wall



Installation with clips directly

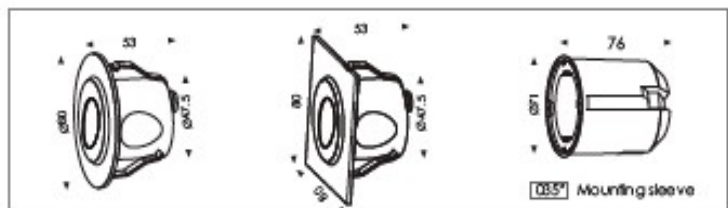

Ø35 Mounting sleeve

### Material specifications

Housing	12" Die-casting aluminum T=20-25µm. Adhesion of 50 class 1/ASTM class 48 high temperature painting
Light Source	Emitter type power LED
Driver	Low & high input-voltage driver inside
Operating temperature	-20°C-40°C
Power cable	H05RN-F 3X1.0mm <sup>2</sup> L=0.3m (high voltage) H05RN-F 2X1.0mm <sup>2</sup> L=0.3m (low voltage)
Mounting sleeve	PVC Ø35

Item No.	Light source	Lens	Lens degree selected by manufacturer(θ1/2)	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance (lm)	IK rate
B1QR0102	1×3W	L0180C010AR	80	24VDC 120/240	24V=110 120V=48 240V=28	24V=2.6 120V=3.3 240V=3.3	Cool white=75 Warm white=66	10
B1QS0102	1×3W	L0180C010AR	80	24VDC 120/240	24V=110 120V=48 240V=28	24V=2.6 120V=3.3 240V=3.3	Cool white=75 Warm white=66	10